

Thermo Scientific GENESYS 10S Spectrophotometer


Split beam accuracy. Small footprint. Rugged local control.



Compact, rugged, reliable

- Durable construction with chemical-resistant materials and sloping surfaces to shed spills
- Stable, repeatable readings in a split-beam instrument design
- Improved performance reliability with a xenon lamp offering a three-year warranty and many years of maintenance-free service
- 3A linear range with high accuracy, precision and repeatability
- Professional support from trained Unity™ Lab Services engineers at your location or in one of our service depots*

* Varies by country

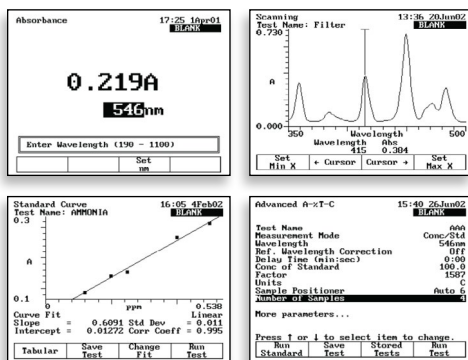


Everything you like about your Helios...

- On-board method storage with Thermo Scientific™ SmartStart™ menu that presents your lab's most common methods immediately upon start-up
- Clear on-board display and button control
- Fixed 1.8 nm spectral bandwidth for resolution performance that matches your current Helios instrument
- Built-in thermal printer option
- For measurements exclusively above 325 nm, the tungsten lamp Visible model offers outstanding value

...and the features you expect in a modern instrument

- 6-cell rotary changer comes installed
- 3-year warranty and >7 year typical lifespan on the UV-Vis xenon source
- USB connections for
 - Data and method export to a memory stick
 - Connection to a remote computer

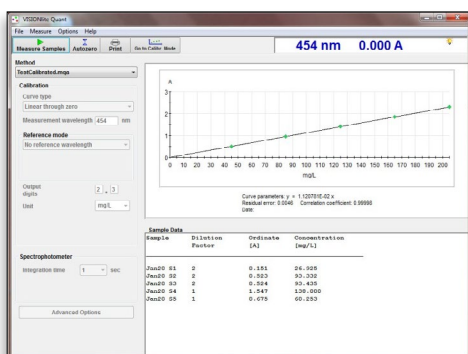

Available Thermo Scientific™ VISIONlite™ 5 software – If you use VISIONlite on your Helios, you can transfer the methods and data directly to your new Thermo Scientific™ GENESYS™ 10S spectrophotometer.



Thermo Scientific Evolution 200 Series Spectrophotometers

Double-beam accuracy with powerful software and touchscreen option

The best combination of features and capability

- Rugged construction with chemical-resistant materials and sloping surfaces to shed spills
- Stable readings and a reference beam in a double-beam instrument design
- Improved performance reliability with a xenon lamp offering a three-year warranty and many years of maintenance-free service
- 3A linear range with high accuracy, precision and repeatability
- Professional support from trained Unity Lab Services engineers at your location or in one of our service depots

Accessories for every sample

- Single-cell, rotary 7-cell changer or linear 8-cell changer with precision positioning and thermostating/Peltier options
- Sipper and autosampler applications
- Integrating sphere for turbid samples and reflectance measurements
- Validated installation available for regulated environments



Additional accessories also available.



Thermo Scientific™ Evolution™ 201 –
double-beam and fixed 1 nm spectral bandwidth

Thermo Scientific Evolution 220 –
double-beam with 1 nm and 2 nm spectral bandwidth

Thermo Scientific Evolution 260 Bio –
double-beam with 1 nm and 2 nm spectral bandwidth and bio-methods

Thermo Scientific™ INSIGHT™ software free with every instrument

- Powerful software features at your fingertips
- Simple interface choices and custom calculations in the same package
- Build the quantitative analysis method you need, no matter how much or how little sophistication you require

INSIGHT 2 software runs on the instrument local control or on your lab computer. Choose between a simplified walk-up user interface or full-featured interface for research and analysis.



**Fisher
Scientific**

© 2015 Thermo Fisher Scientific Inc. All rights reserved.
Trademarks used are owned as indicated at www.fishersci.com/trademarks.

Austria: +43 (0) 800-20 88 40 **Belgium:** +32 (0) 56 260 260 **Denmark:** +45 70 27 99 20
Germany: +49 2304 932-5 **Ireland:** +353 (0) 1 885 5854 **Italy:** +39 02 950 59 478
Finland: +358 (0) 9 8027 6280 **France:** +33 (0) 3 88 67 14 14 **Netherlands:** +31 (0) 20 487 70 00
Norway: +47 22 95 59 59 **Portugal:** +351 21 425 33 50 **Spain:** +34 902 239 303
Sweden: +46 31 352 32 00 **Switzerland:** +41 (0) 56 618 41 11 **UK:** +44 (0) 1509 555 500

FL52667_E 03/15M

Thermo
SCIENTIFIC

A Thermo Fisher Scientific Brand